


33,000 lbs. Caterpillar
928F Wheel Loader

Pro FastFalls

These incredibly strong one-piece units feature an internal baffling system, support cones and a reinforced spillway. The 'inside the liner' design plus rear liner attachment simplifies installation and eliminates leaking. The top can be covered with rock, gravel, soil or mulch to blend seamlessly with the surrounding landscape.

Pro Series FastFalls Model Features:

1. Molded support cones give the Pro FastFalls their incredible strength and also help diffuse the water flow.
2. Two internal baffles slow down the water's velocity and ensure even water distribution across the spillway.
3. Raised front radius holds back any loose gravel, soil or mulch used to camouflage the top of the unit.
4. Pro FastFalls are completely sealed except for the spillway opening. This design eliminates any chance of leakage due to 'over pumping'.
5. Molded gussets support the spillway lip.
6. Pro FastFalls come with an installed 2" or 3" FIPT Spinweld® fitting.
7. One-piece liner flange and molded-in inserts ensure a watertight liner attachment every time.

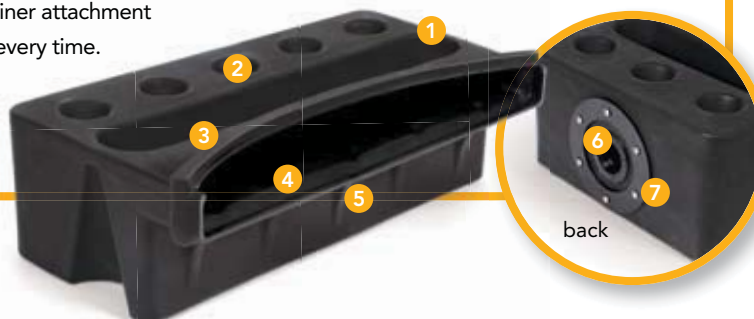

MODELS :



Model: SP1900

Dimensions: 20½"W x 17"D x 10¼"H

Waterfall Width: 19"

Max Pump Flow: 4,000 gph

Bulkhead: 2" FIPT

Application: Pond-free



Model: SP2600

Dimensions: 27½"W x 17"D x 10¼"H

Waterfall Width: 26"

Max Pump Flow: 6,000 gph

Bulkhead: 2" FIPT

Application: Pond-free



Model: SP3800

Dimensions: 39½"W x 17"D x 10¼"H

Waterfall Width: 38"

Max Pump Flow: 9,000 gph

Bulkhead: 3" FIPT

Application: Pond-free



Model: PV1800

Dimensions: 18"W x 24"H

Max Pump Flow: 10,000 gph

Opening: 14"



Model: PV18EXT

Dimensions: 16½"W x 19½"H

Extension: 17"



Model: PV2300

Dimensions: 23"W x 30"H

Max Pump Flow: 15,000 gph

Opening: 18"



NEW!

Model: PV23EXT

Dimensions: 21½"W x 19½"H

Extension: 17"