

STRIP LIGHT GUIDE

CUT SHEET

DESCRIPTION:

The Brilliance LED AC (TPU-Gen III) Strip Light is rated for outdoor use and can be directly connected to an existing 8-16 VAC landscape lighting system. Great accent lighting for stairs, railings and overhangs. The LEDs on this Strip Light are encased in non-yellowing material that installs easily.


FEATURES:

- Dimmable with most magnetic transformers
- Max length for power feed is 12m (39' 4")
- Available in 25 meter reels or custom cut to specific lengths





Wattage Lumens Kelvin Temperature	1.8 per meter 144 (45/ft) 2700, 5000
Color	red, green, blue
Operating Range	8-16 VAC
CRI	75
IP	65
Lamp Life (hours)	35,000
Warranty (years)	3

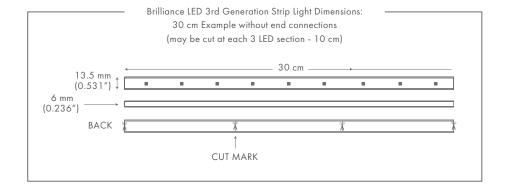



Double-Sided Connector Kit

Part # - 0 35127 47542 4 1 - Double-Sided Connector

- 2 Clear Plastic Retainers
- 2 Metal Anti-Slip Plates 1 - Heat Shrink Tube



Power Feed Kit

Part # - 0 35127 47544 8

- 1 Power Feed
- 1 Clear Plastic Retainer
- 1 Metal Anti-slip Plate
- 1 Heat-shrink Tube



Extrusion Kit
Part # - 0 35127 47611 7
1 m (3.2') Extrusion
sections



Jumper Connector Kit Part # - 0 35127 47606 3

- 1 Jumper Connector
- 2 Clear Plastic Retainers
- 2 Metal Anti-slip Plates
- 2 Heat-shrink Tubes



"T" Power Feed Connector Kit

Part # - 0 35127 47608 7

- 1 "T" Power Feed
- 2 Clear Plastic Retainers
- 2 Metal Anti-slip Plates
- 2 Heat-shrink Tubes



Clip & Screw KitPart # - 0 35127 47543 1
50 - Plastic Clips

100 - Flasiic Clips



90° Jumper Connector Kit

Part # - 0 35127 47698 8

- 1 Jumper Connector
- 2 Clear Plastic Retainers
- 2 Metal Anti-slip Plates
- 2 Heat-shrink Tubes





End Cap Kit


Part # - 0 35127 47607 0

- 1 End Cap
- 1 Light Shield
- 1 Heat-shrink Tube


INSTRUCTIONS

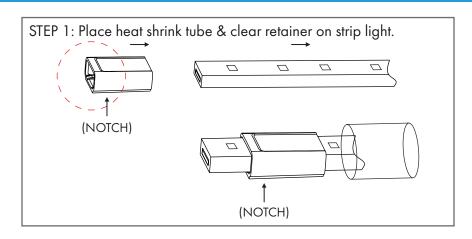


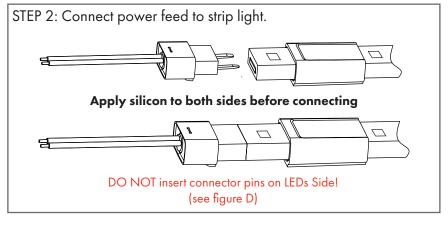

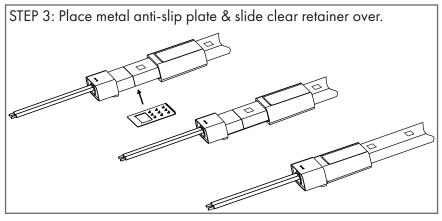



INSTRUCTIONS

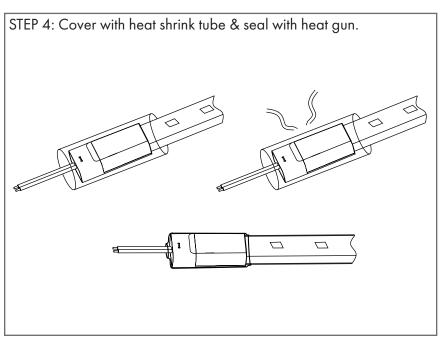

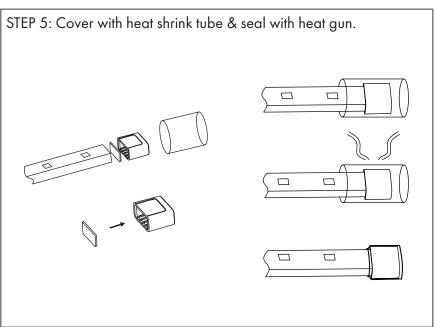

FIGURES

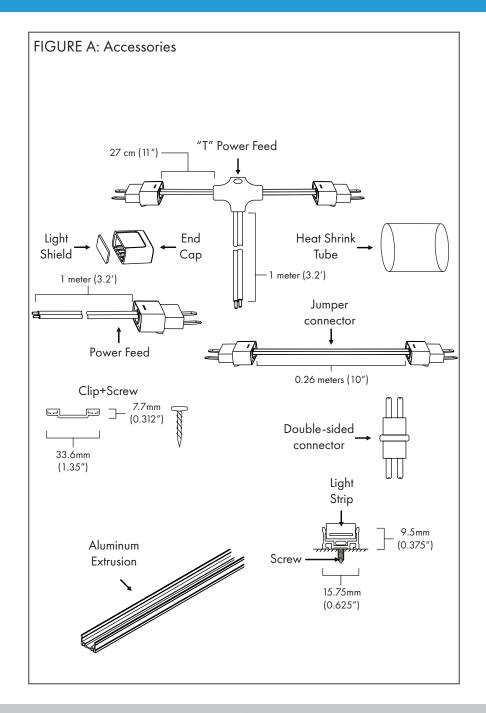

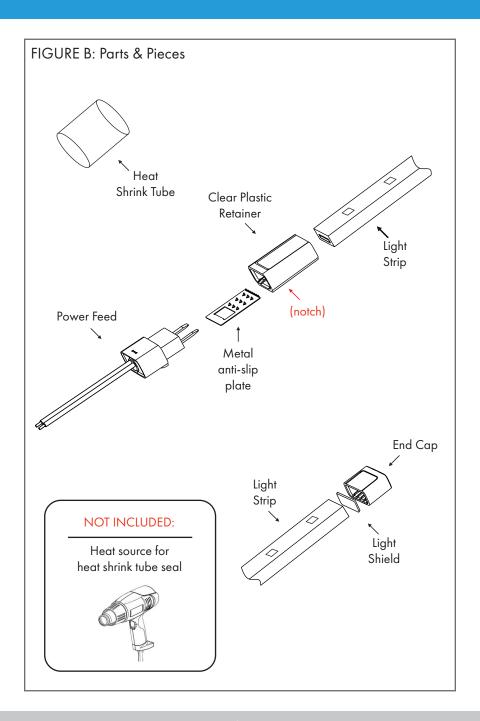

FIGURES

