




HOT TUBS/SPAS

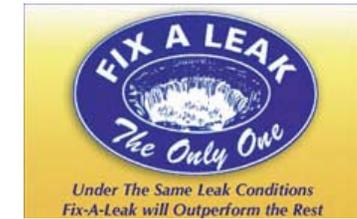

GENERAL INFORMATION

FIX-A-LEAK

- : is a blended concentrated material designed to seal leaks in virtually any material
- : can be applied for leaks in the shell and works equally well in plumbing
- : will seal holes 1/8" in diameter
- : will form a permanent seal

Use 8 oz. per 1,000 gallons for minor leaks. A second bottle can be added for larger leaks.

PRECAUTION:

Keep out of Reach of Children.

Can cause severe eye and skin irritation. Do not get in eyes, on skin, or on clothing. Harmful or fatal if swallowed. Avoid contamination of food. Rinse empty container thoroughly with water and discard.

FIRST AID:

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, contact a physician. Remove and wash contaminated clothing before reuse. If swallowed, drink milk, egg whites, gelatin solution. If these are not available, drink large quantities of water. Call a physician immediately.

DIRECTIONS

Shake Well Before Using

1. Bypass Filter before adding **FIX-A-LEAK** to water.
2. With pump running add **FIX-A-LEAK** slowly through skimmer or in front of any other suction intake.
3. **FIX-A-LEAK** is very heavy and will sink to the lowest point rather quickly. It must be stirred back into suspension every 4-6 hrs. during circulation of water.
4. Continue to recirculate water until the leak has stopped.
5. After the leak has stopped, give it the proper time to cure (24-48 hrs.). You may then return to normal filtration.
6. Treatment can be repeated if necessary.

NOTE Never allow cartridges or DE elements to dry before they are cleaned. Rinse clean with water.

It is advisable, if your spa is a foam insulated type and has been leaking for a long period of time:

Once you determine the leak has stopped, drain your tub. Properly wipe down the spa with a wet cloth, nothing abrasive. Allow to dry for 4-5 days to all **FIX A LEAK** to properly cure.

Specializing in leak repair since 1980.



Home