



The C-Frame Downspray is a 360° spray jet that distributes water evenly across the wetted surface area. Stake assembly options provide savings in labor and installation time.

Features

- 45° downspray reduces the effect of wind.
- Gentle spray minimizes damage to delicate plant foliage.
- Galvanized wire stake assembly with 36" tubing.
- Three color coded frames to identify flow rates.
- "Quick" thread for easy insertion into tubing.
- Shut-Off Clip to stop flow.
- UV stabilized for long life.

Applications


Nurseries, tree lots, potted plants, home and landscaped gardens.



CFd® Downspray Black

CFd® Downspray Brown

CFd® Downspray Blue

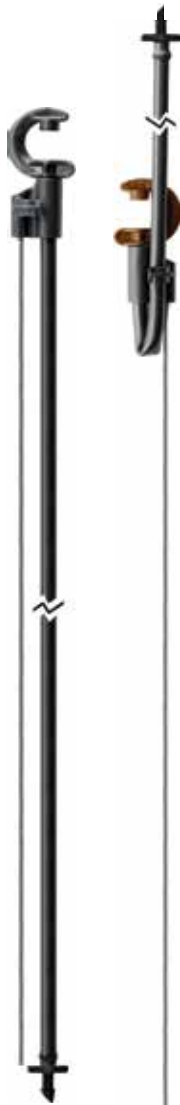

CFd® Downspray Wire Stake Assembly

| Performance | | 360° | |
|------------------------|----------------|------------|---------------|
| COLOR AND ORIFICE SIZE | PRESSURE (psi) | FLOW (gph) | DIAMETER (in) |
| Black 0.032" | 10 | 4.8 | 24 |
| | 15 | 6.0 | 24 |
| | 20 | 7.2 | 20 |
| Brown 0.035" | 10 | 6.0 | 24 |
| | 15 | 7.5 | 20 |
| | 20 | 8.6 | 20 |
| Blue 0.039" | 10 | 7.0 | 24 |
| | 15 | 8.9 | 20 |
| | 20 | 10.5 | 20 |

CFd® Downspray

| COLOR | ORIFICE SIZE | PART NUMBER | PACK QUANTITY | PACKS PER CARTON | CARTON (lbs) |
|-------|--------------|-------------|---------------|------------------|--------------|
| Black | 0.032" | 19005 | 100 | 50 | 18.1 |
| Brown | 0.035" | 19025 | 100 | 50 | 18.1 |
| Blue | 0.039" | 19015 | 100 | 50 | 18.1 |

CFd® Downspray Galvanized Wire Stake Assembly with Shut-Off Clip

| COLOR | TUBE LENGTH | PART NUMBER | PACK QUANTITY | PACKS PER CARTON | CARTON (lbs) |
|-------|-------------|-------------|---------------|------------------|--------------|
| Black | 36" | 54305 | 25 | 12 | 20.1 |
| Brown | 36" | 54325 | 25 | 12 | 20.1 |
| Blue | 36" | 54315 | 25 | 12 | 20.1 |

Specifications

| DIMENSIONS ASSEMBLED | | CFd® DOWNSPRAY | CFd® DOWNSPRAY WIRE STAKE ASSEMBLY |
|-----------------------------|--|--------------------------------------|---|
| HEIGHT | | 1.3" | 37.4" |
| WIDTH | | 1.0" | 1.0" |
| DEPTH | | 0.3" | 0.6" |
| WEIGHT (approx) | | 0.05 oz | 1.00 oz |
| UV STABILIZED MATERIALS | FRAME STAKE ADAPTER OFF-TAKE TUBE BARB ADAPTER STAKE | acetal | acetal polypropylene PEVA acetal galvanized steel |
| BASE/CONNECTION TYPE: Inlet | | QUICK THREAD WITH SEALING BARB 0.16" | BARB 0.16" |