



CONTROLLERS

WIRELESS WEATHER STATION

SLW5

Wireless Weather Station


- ✓ Microprocessor records and processes weather data for use in establishing "Smart" auto adjust run times on any SmartLine® controller
- ✓ Rain shut-off settable from 1/8 - 1" (3 - 25 mm)
- ✓ Extended rain delay adds time to rain events before deficits begin to accumulate
- ✓ Rain events decrement current deficits in the SmartLine® controller
- ✓ Freeze shut-off activated at 37°F (3.0°C)
- ✓ Protective white solar shields allow normal air flow while protecting sensor from direct sunlight for accurate temperature readings and eliminating the need for regular cleaning and maintenance of the weather station
- ✓ Unit can be mounted in sunlight or shade and in close proximity to the roof-line

- ✓ Maximum wireless distance from controller to weather station is 1500' (457 m) line of site.
- ✓ SLHUB-RF-5 wireless hub included with SLW5
- ✓ On-board diagnostics indicate battery and communication status
- ✓ Remote battery strength measurement from the SmartLine® controller
- ✓ 10-Year battery life (AAA lithium)
- ✓ Adjustable arm metal bracket for gutter thumb-screw or wall mount
- ✓ Operates on 900MHz frequency for superior range and reliability



SLW5 Specifications

MODEL	DESCRIPTION
SLW5	Wireless Weather Station for ET Based Watering - 1500' Line of Site Range
SLHUB-RF-5	Wireless Receiver - Included with SLW5

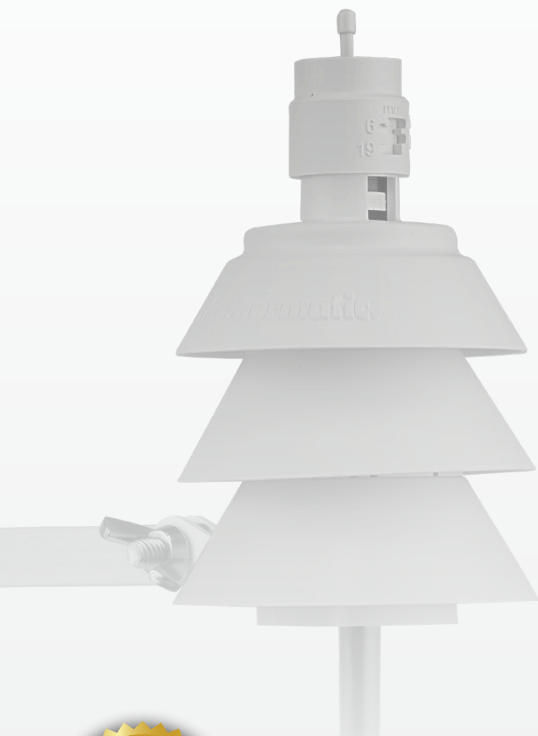

1,000 gallons given per sensor

Our mission is to deliver clean drinking water to thousands of families in need, and to inspire our partners to put water first in irrigation, design, installation, and maintenance.

Copyright 2020 Weathermatic. All Rights Reserved AD4003_revE






CONTROLLERS

WIRED WEATHER STATION

SLW1

Wired Weather Station

- ✓ Microprocessor records and processes weather data for use in establishing “Smart” auto adjust run times on any SmartLine® controller
- ✓ Rain shut-off settable from 1/8 - 1” (3 - 25 mm)
- ✓ Extended rain delay adds time to rain events before deficits begin to accumulate
- ✓ Rain events decrement current deficits in the SmartLine® controller
- ✓ Freeze shut-off activated at 37°F (3.0°C)
- ✓ Protective white solar shields allow normal air flow while protecting sensor from direct sunlight for accurate temperature readings and eliminating the need for regular cleaning and maintenance of the weather station
- ✓ Unit can be mounted in sunlight or shade and in close proximity to the roof-line
- ✓ On-board diagnostics indicate battery and communication status
- ✓ Adjustable arm metal bracket for gutter thumb-screw or wall mount
- ✓ Wired directly to the SmartLine® controller via the 35 feet of included cable

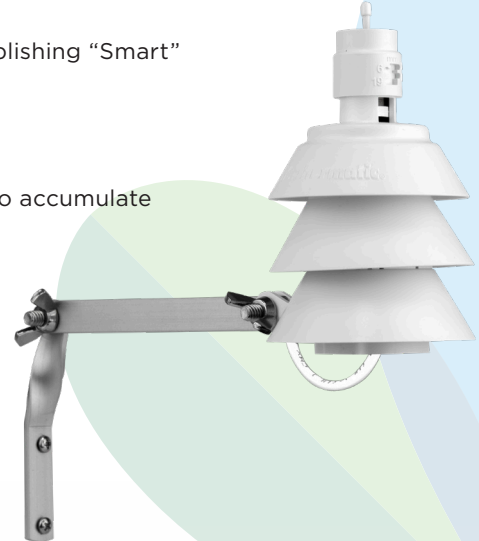

SLW1 Specifications

MODEL	DESCRIPTION
SLW1	Wired Weather Station for ET Based Watering, 35ft of cable provided



1,000 gallons given per sensor

Our mission is to deliver clean drinking water to thousands of families in need, and to inspire our partners to put water first in irrigation, design, installation, and maintenance.

Copyright 2020 Weathermatic. All Rights Reserved AD4003_revE

