




**FEATURES:**




- Executive wet end designed specifically for 56-frame motors
- Two double shielded ball bearings with moisture resistant grease for quieter operation and longer life
- Two speed motors have four sets of insulated windings for increased efficiency
- 56-frame motor for added strength, cooler operating temperature and longer motor life
- Large 2 ½" intake for improved flow performance and reduced noise
- Large 6 ½" diameter wet end for higher head pressure
- Split capacitor, (start and run) for less energy consumption
- Thermally protected to extend life expectancy of motor
- Highly versatile wet end can be rotated every 90°
- Viton seals

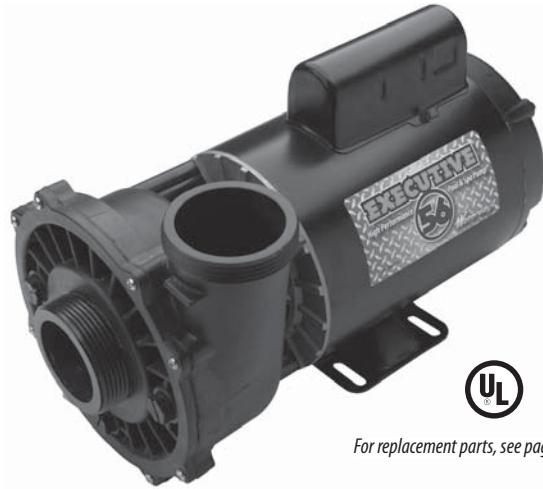

For replacement parts, see page 269

Call for available cords and plugs.

**PRESSURE VERSUS FLOW RATE**

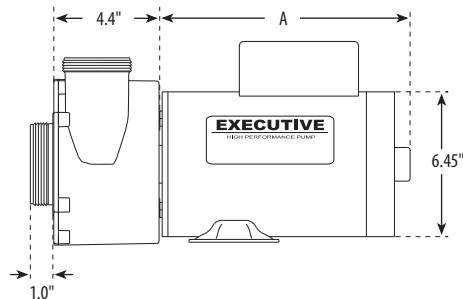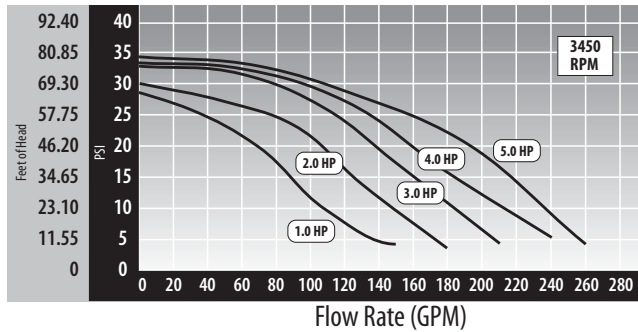

**2-Speed Executive 56-Frame Pumps**

Part No.	Description	HP	Volts	Amps High Speed	Amps Low Speed	Hz	Dimension "A"	Weight (lbs.)	List (US \$)
3720821-1D	2" Intake - 2" Discharge	2	230	8.0	3.0	60	8.875"	34	635.62
3720821-13	2 ½" Intake - 2" Discharge	2	230	8.0	3.0	60	8.875"	34	635.62
3721221-1D	2" Intake - 2" Discharge	3	230	10.0	3.4	60	9.875"	37	679.16
3721221-13	2 ½" Intake - 2" Discharge	3	230	10.0	3.4	60	9.875"	37	679.16
3721621-1D	2" Intake - 2" Discharge	4	230	12.0	4.4	60	10.375"	44	740.48
3721621-13	2 ½" Intake - 2" Discharge	4	230	12.0	4.4	60	10.375"	44	740.48
3722021-1D	2" Intake - 2" Discharge	5	230	16.4	4.8	60	10.375"	47	840.85
3722021-13	2 ½" Intake - 2" Discharge	5	230	16.4	4.8	60	10.375"	46	840.85

**1-Speed Executive 56-Frame Pumps**

Part No.	Description	HP	Volts	Amps	Hz	Dimension "A"	Weight (lbs.)	List (US \$)
3710821-1D	2" Intake - 2" Discharge	2	230	8.0	60	8.875"	34	635.62
3710821-13	2 ½" Intake - 2" Discharge	2	230	8.0	60	8.875"	34	635.62
3711221-1D	2" Intake - 2" Discharge	3	230	10.0	60	9.875"	34	679.16
3711221-13	2 ½" Intake - 2" Discharge	3	230	10.0	60	9.875"	34	679.16
3711621-1D	2" Intake - 2" Discharge	4	230	12.0	60	10.375"	41	704.54
3711621-13	2 ½" Intake - 2" Discharge	4	230	12.0	60	10.375"	40	725.14
3712021-1D	2" Intake - 2" Discharge	5	230	16.4	60	10.375"	45	725.14
3712021-13	2 ½" Intake - 2" Discharge	5	230	16.4	60	10.375"	45	734.69